

# PURESTREAM

ELECTRIC DRAINS



BY  
**CAG**  
PURIFICATION

**TSD-719**



## **PURE PNEUMATIC ENERGY**

- Electrically approved for Canada
- 10" Power cord complete with three prong plug
- Y-Strainer inlet ball valve with a 1/2" male x 1/2" female connection

# PURE PNEUMATIC ENERGY

## PURESTREAM TSD-719 TIMER CONTROLLED CONDENSATE DRAIN

The Purestream model TSD-719 timer controlled drain series is our premium timer drain with a built-in-y-strainer ball valve. The TSD-719 timed electric drain is designed to drain condensate from air compressors, moisture separators, filters, receiver tanks, air dryers and drop legs in a compressed air system. Second only to our premium no air loss energy saving Bekomat drains the TSD is the best quality option available in the competitive timer drain market. The TSD drain will provide consistent and reliable performance, fully approved for Canada, competitively priced and available from stock.

The TSD-719 timer drain will control condensate drainage at any interval between the adjustable time cycles from 0.5 to 45 minutes and the draining time can be set between 0.5 seconds to 10 seconds. Each drain consists of a timer, solenoid valve, coil, din connector, gaskets, y-strainer ball valve 10" power cord with three pronged plug.


### Timer Technical Data

Interval Time Off Min	0.5-45 minutes adjustable
Discharge Time On Sec	0.5-10 seconds adjustable
Supply Voltage	115/1/60 Hz
Voltage Tolerance	+ or - 10%
Manual Test Switch	standard
Current	4mA
Switch Capacity:	1A
Operating Temperature	-20°C to + 50°C
Protection Class	IP65, NEMA 4 installed
Timer Case Material	FR grade ABS plastic flame-proof
Connection	DIN43650A ISO4400/6952
Indicators	Yellow valve open or closed
Approval	QPS inspection to CSA special inspection guideline SPE1000-13

### Valve Technical Data

Valve Type	2/2 way direct acting
Connection Ports In/Out	1/2" npt female
Maximum Working Pressure	232 psig
Operating Temperature	2°C to 80°C
Maximum Fluid Temperature	90°C
Valve Construction	brass
Orifice Size	3.5mm
Protection	IP65
Supply Voltage	115/1/60 Hz
Voltage Tolerance	+ or - 10%
Coil	H grade
Mounting Configuration	any
Approval	QPS inspection to CSA special inspection guideline SPE1000-13

\* Other Voltages Available

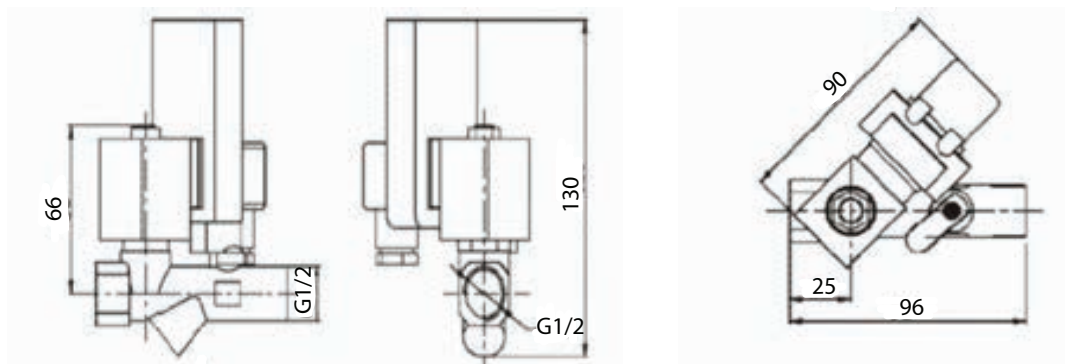

3770B Laird Road, unit 2, Mississauga Ontario, Canada L5L 0A7  
 tel: 905-820-3348 1-800-951-0777 fax: 905-820-3490  
[www.cagpurification.com](http://www.cagpurification.com)